

Detail Coat on 3" minimum either side of the joint with Qualipur 152 Primer followed by Qualipur 252 Membrane


Qualideck Coating System

Crack less than $\frac{1}{16}$ " width

Routed and sealed with polyurethane sealant

Structural slab

Crack greater than $\frac{1}{16}$ " width

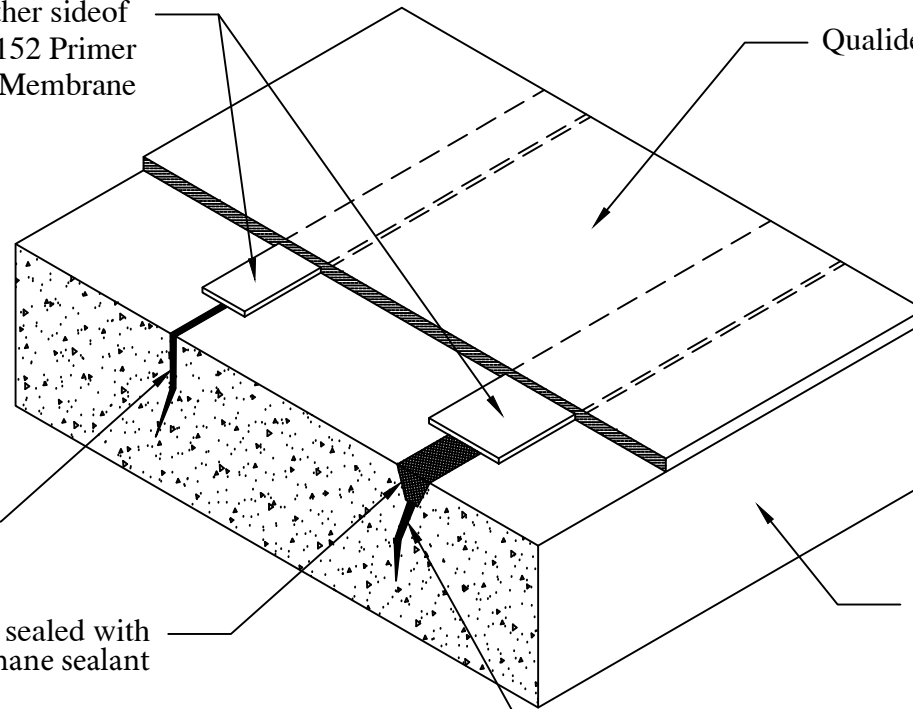

Disclaimer - This detail drawing is intended as a general reference for the condition shown. It is not a specific solution for conditions experienced in the field. To identify specific materials and mil thickness, refer to the Qualideck application guide.

Qualideck® 

ADVANCED POLYMER TECHNOLOGY

109 Conica Lane, P.O. Box 160

Harmony, Pa. 16037 USA

T: (888) 266-4221 / www.qualideck.com

DRAWING:

CRACK DETAIL

SCALE:
NTS

DATE:
05/15/17

DWG NO.:
CD-002